


ARIES

CHLORINE REDUCTION

CARBON BLOCK SERIES, DROP-IN CARTRIDGE

**CHLORINE REDUCTION
TASTE & ODOR CORRECTION**

Carbon filtration is an inexpensive and effective way to remove chemicals and contaminants commonly found in tap water. Aries Chlorine Reduction Carbon Block cartridges are an ideal choice for taste and odor control and chlorine reduction. Each block is wrapped with a polypropylene outer layer and netting to prevent premature clogging of the carbon block.

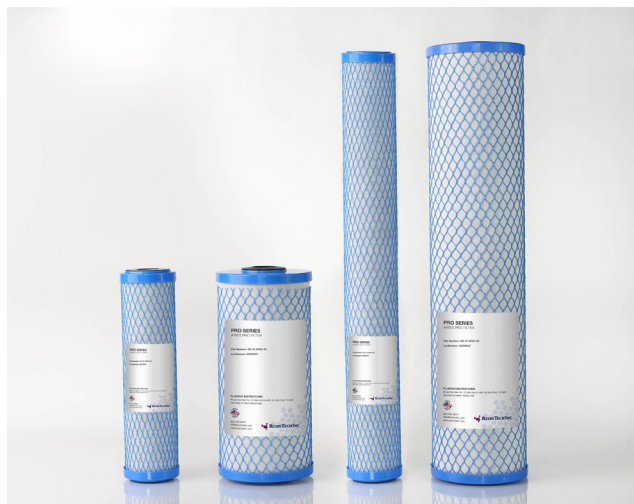

FEATURES & BENEFITS

- 5-10 micron rating
- Low pressure drop
- Exceptionally high organics capacity
- Lead Free Certified

APPLICATIONS

- Dechlorination
- Odor Correction
- Taste Correction

CERTIFICATIONS

- NSF Certified
 - NSF/ANSI Standard 42
- California Prop 65 Compliant

OPERATING CONDITIONS

Micron Rating (μ): 5.00-10.00

Operating Temp Range: 40-125°F


Operating Pressure Range: 20-125 PSIG

Revision 1.0
ResinTech, Inc.®



PART NUMBER	DIMENSIONS	NOMINAL RATING	CAPACITY* (gallons)	PRESSURE DROP (psid)
CB-10-6305-TO	2.5 x 10 in. (Slim Line)	5μ	8,000 at 1 gpm	1.0
CB-20-6305-TO	2.5 x 20 in. (Slim Line)	5μ	16,000 at 2 gpm	2.5
CB-10-6305-BB-TO	4.5 x 10 in. (Big Blue)	5μ	16,000 at 3 gpm	5.0
CB-20-6305-BB-TO	4.5 x 20 in. (Big Blue)	5μ	34,000 at 7 gpm	8.0
CB-10-6310-TO	2.5 x 10 in. (Slim Line)	10μ	6,000 at 1 gpm	0.5
CB-20-6310-TO	2.5 x 20 in. (Slim Line)	10μ	14,000 at 1 gpm	2.5
CB-10-6310-BB-TO	4.5 x 10 in. (Big Blue)	10μ	16,000 at 1 gpm	5.0
CB-20-6310-BB-TO	4.5 x 20 in. (Big Blue)	10μ	34,000 at 1 gpm	8.0

*Based on internal manufacturer's testing.

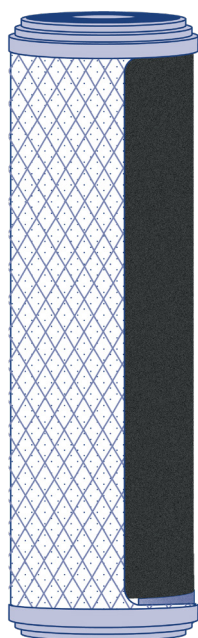

PHYSICAL SPECIFICATIONS

Netting Color: Blue

Netting Material: PP

End Caps: PP

Gasket: TE

Media: Activated Carbon



**WE ARE PROUD TO BE
ISO 9001 : 2015 CERTIFIED**



**Filter Cartridge has been tested and certified by
NSF International Against NSF/ANSI Standard 42 for
material requirements only.**

IMPORTANT NOTICE TO USER: The following is made in lieu of all other warranties expressed or implied. Manufacturer's and Seller's only obligation shall be to issue credit against the purchase or replacement of the equipment proved to be defective in material or workmanship. Neither Manufacturer nor Seller shall be liable for any injury, loss or damage, direct or indirect, special or consequential, arising out of the use of, misuse, or the inability to use such product. The information contained herein is based on technical data and tests which we believe to be reliable and is intended for use by persons having technical skill at their discretion and risk. Since conditions of use are outside ResinTech's control, we can assume no liability whatsoever for results obtained or damages incurred through the application of the data presented. This information is not intended as a license to operate under, or a recommendation to infringe upon, any patent of ResinTech's or others covering any material or use. The foregoing may not be altered except by written agreement signed by officers of the manufacturer.